
FLIGHT PLAN & SITE SURVEY

L 115-4047 BALSA BEAVERS MFC INC.- CENTENNIAL PARK
FLYING CIRCLES

July 10, 2026



IMPORTANT NOTICE

Please ensure you have received all required authorizations prior to flight. This Site Survey was created using RPAS Wilco. The user accepts all responsibility for the accuracy of the information.

Terms & Conditions: rpaswilco.com/#tnc

Mission Information

L 115-4047 Balsa Beavers MFC Inc. - Centennial Park Flying Circles

Flight Details

Reference No:	MAAC-115-4047
Project Name:	Balsa Beavers MFC Inc.
Pilot Name:	MAAC
Pilot Certificate:	
Mission Type:	VLOS
Flight Start:	July 10, 2026 12:51 PM
Flight End:	July 10, 2026 01:51 PM

Location Details

Flight Address:	CENTENNIAL PARK FLYING CIRCLES
Latitude:	43° 39' 12.70" N (43.654)
Longitude:	79° 35' 33.20" W (-79.593)
Field Elevation:	505 ft MSL
Altitude / Radius:	400 ft / 926 m (0.5 nm)
Classification:	CONTROLLED
FIR / Contact:	CZYZ / 905-676-4509

NOTES

Your flight is in controlled airspace.
If your RPAS is > 250g, please obtain RPAS Flight Authorization using the NavDrone app or by contacting NavCanada. (CARs 901.71)


Report Contents

Site Survey • Obstacles (if available) • Nearby Aerodromes • Canadian Aviation Regulations • GFA • Aerodrome Supplements • METAR & TAF • NOTAMS • CFS





Flight Map & MODEL Details

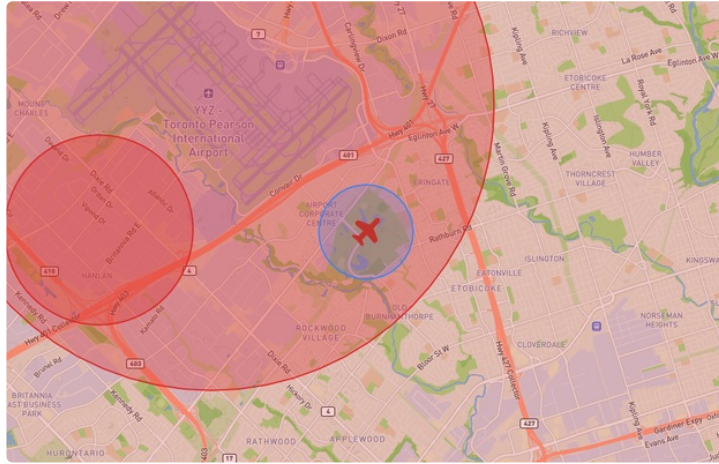MISSION LOCATION SURVEY

FLIGHT AREA MAP



MISSION LOCATION DETAILS

ROLE	LATITUDE	LONGITUDE
 MODEL	43° 39' 12.70" N 43.654	79° 35' 33.20" W -79.593
 Pilot		
 Payload Op.		
 Observer		

Airspace Classification

MISSION LOCATION SURVEY

AIRSPACE MAP



OVERLYING AIRSPACES


Class	Name	Floor	Ceiling
C	Toronto/Lester B. Pearson Intl, ON [CZ]	SFC	2500MSL
E	3.4.1-43 [TA]	700AGL	18000MSL

NEAREST AERODROMES & DISTANCE FROM OPERATION

LESTER B. PEARSON INTL (CYYZ - AERODROME - Cert)	Lat: 43.676	Long: -79.63	3.919KM	2.116NM	NW
Operator: GREATER TORONTO AIRPORTS AUTHORITY; PHONE: 416-776-3056, POST: UNKNOWN, URL: https://www.torontopearson.com/en FIR Contact: 905-676-4509					
TARTEN (CPA5 - HELIPORT - Cert)	Lat: 43.654	Long: -79.658	5.247KM	2.833NM	W
Operator: TARTEN EQUIPMENT LTD; PHONE: 905-670-1704, POST: UNKNOWN FIR Contact: 905-676-4509					
BILLY BISHOP TORONTO CITY AIRPORT (CYTZ - AERODROME - Cert)	Lat: 43.627	Long: -79.396	16.071KM	8.678NM	E
Operator: TORONTO PORT AUTHORITY; PHONE: 416-203-6942, POST: UNKNOWN FIR Contact: 905-676-4509					

TORONTO / LESTER B. PEARSON INTL ON

CYYZ

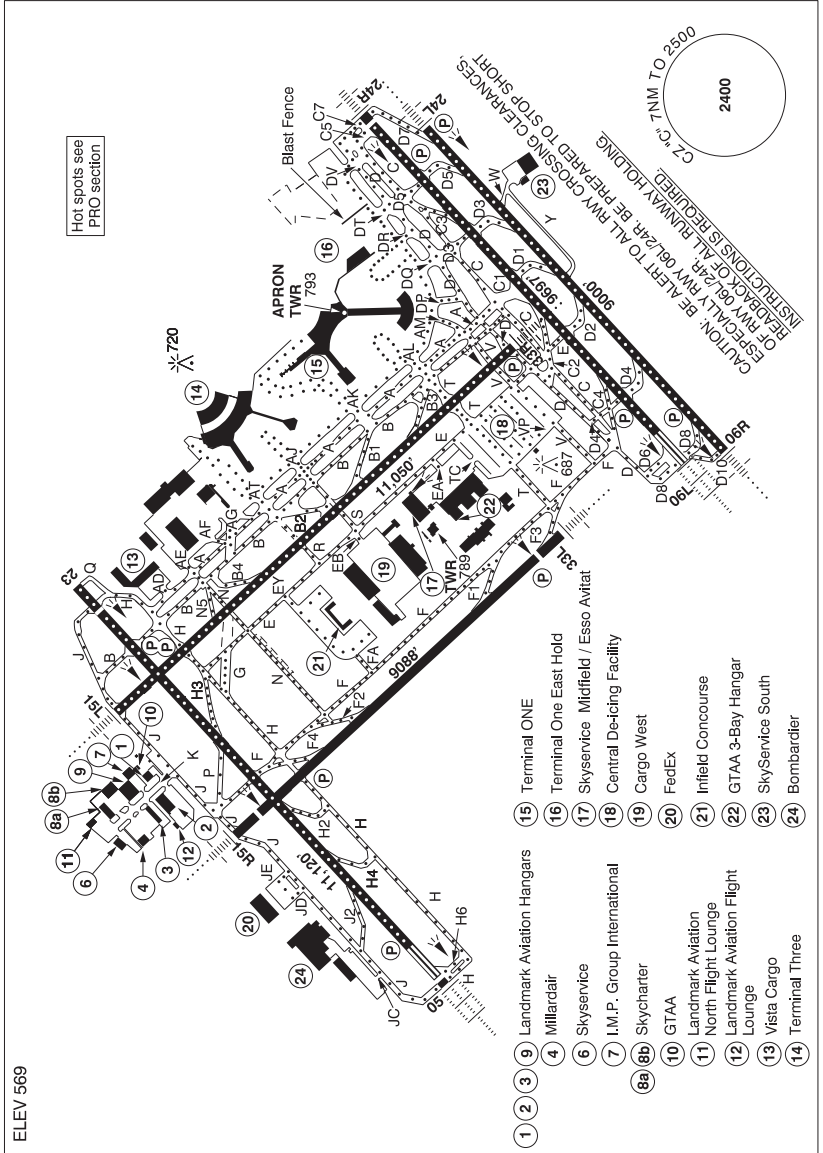

REF	N43 40 34 W79 37 50 AdjW 10°W UTC-5(4) Elev 569' VTA A5000 LO6 H15 T2 CAP OC
OPR	Greater Toronto Airports Authority 416-776-3056 www.torontopearson.com/en H24 Cert Ldg fees
PF	A-1,2,3,5,6,7 C-4

ONTARIO

AERODROME / FACILITY DIRECTORY

TORONTO / LESTER B. PEARSON INTL ON (Cont'd)

CYYZ

CUST	AOE 888-226-7277 General aviation aircraft must clear customs at the fixed base opr of their choice. Ramp charges may apply.
FLT PLN	Pilots to open/close VFR Flt Pln with London FIC via phone or London rdo 123.275 when practicable.
FIC	London 866-WXBRIEF (Toll free within Canada) or 866-541-4104 (Toll free within Canada & USA)
WX	METAR H24. TAF H24, issue times: 00, 03, 06, 09, 12, 15, 18 & 21Z.
ACC	Toronto 905-676-4590/4591/4592 or 888-217-1241. Flt pln by Fax at 905-676-5044 & include phone numbers where pilot can be reached prior to dep.
DUAT	Esso Avitat; Landmark Aviation; Skycharter
SERVICES	
FUEL	JA, JA-1 (FSII avbl), JB, HPR
OIL	All
S	1,2,3
ARFF	DESIGNATED CAT 9
SUP FL	D & A-ice, LHOX
JASU	CE16
PVT ADV	Landmark Aviation 122.95 H24; Skycharter Ltd 129.75 1130-08Z† Skyservice/Esso Avitat 128.95 H24
MIL CON	Signature Flight Support (Shell) 905-677-5777

ONTARIO

AERODROME / FACILITY DIRECTORY

TORONTO / LESTER B. PEARSON INTL ON (Cont'd)

CYYZ

RWY DATA	<p>Rwy 15L(147°)/33R(327°) 11,050x200 ASPH Rwy 15R(147°)/33L(327°) 9088x197 ASPH Thlds 15R & 33L displ 588 Rwy 05(057°)/23(237°) 11,120x200 ASPH Thld 05 displ 135' Thld 23 displ 686' Rwy 06L(057°)/24R(237°) 9697x197 ASPH Thld 24R displ 197' Rwy 06R(057°)/24L(237°) 9000x197 ASPH RESA: All Rwys 492' Departures from holding bay inner centerlines Rwy 06L/D6, 24R/C5 and 05/H6 subtract 263' from declared distances.</p>
RWY CERT	<p>Rwy 15L RVR 1200(1/4sm)/Rwy 33R RVR 600 AGN V Rwy 15R RVR 1200(1/4sm)/Rwy 33L RVR 1200(1/4sm) AGN V Rwy 05 RVR 600/Rwy 23 RVR 1200(1/4sm) AGN V Rwy 06L RVR 600/Rwy 24R RVR 1200(1/4sm) AGN V Rwy 06R RVR 1200(1/4sm)/Rwy 24L RVR 1200(1/4sm) AGN V</p>
TWY CERT	<p>Twy JC AGN II Twy K AGN IV Twy: W, Y AGN IIIB</p>
TWY	<p>Twy D4, D5 south of rwy 06L/24R: Angled rwy hold positions in effect. Twy K is <u>uncontrolled</u> & is rstd to acft with wingspans 41.15m/135' (B757W) or less & an Aircraft Load Rating of 9.0 or less. Other acft may be auth with prior appr from opr. Design spd for C2, B2, H3, D1, D2, D3, D4, D5, D7 & D8 is 50 kt (93 kph). Design spd for J2, F1, F2, F3 & F4 is 45 kt (85 kph). All other rapid exits designed for an exit speed of 35 kt (65kph). Normal Rwy 23 depts are from Twy "H". Rwy 23 depts do not enter Twy "Q" without specific clearance from ATC. Acft requiring full length must notify gnd ctl on initial contact. During CAT II/III arrivals 05 departures shall be from H6 Twys W & Y rstd to acft with wingspans less than 36m.</p>
APRON	<p>At all T1, T1 East Hold, T3, Infield & FedEx Apron/Parking areas, all acft must contact the applicable Apron Advisory prior to engine start at gate, pushback or taxi. Fedex Apron rstd to acft with wingspans 51.9m/170' or less. Taxilane btwn 3C and 4C rstd to acft with wingspans less than 36m. Wingspans of 64.9m/213' permitted to Gate C27 Code E. Asphalt apron sfc E of positions 5G and 6F to 103 rstd to acft with wingspans 28.4m/93' (DH8-400) or less & an acft load rating of 9.0 or less. Outer/East loop btwn 7E-8E rstd to acft with wingspans less than 36m and Inner/East loop btwn 7D-8D rstd to acft with wingspans 79.9m/262' or less. Simultaneous use of lane 7 & 8 max wingspan 64.9m/213' Code E. Outer/North loop btwn 9C-9D-10D-10C rstd to acft with wingspans less than 36m. Strict adherence to Taxilane centreline required btwn DR and DV and on Taxilanes 10 through 12. Taxilane 10 rstd to acft with wingspans 36m/118' or less. Refer to CAP parking areas (Terminal 1 and Terminal 1 East Hold) for details. Proceed only to gates assigned by Apron Advisory. Bombardier Apron: Pvt SkyService South Apron: Heli ops not auth. Pvt.</p>
RCR	<p>Opr CRFI, PCN</p>
LIGHTING	<p>05-AL(TE HI A TDZL) P3, 23-(TE HI A) P3 06L-AL(TE HI A TDZL) P3, 24R-AW AS(TE HI A) P3 06R-AN(TE HI A) P3, 24L-AN(TE HI A) P3 15R-AN(TE HI) P3, 33L-AN(TE HI) P3 15L-AN(TE HI A) P3, 33R-AN(TE HI A) P3</p>

ONTARIO

AERODROME / FACILITY DIRECTORY

TORONTO / LESTER B. PEARSON INTL ON (Cont'd)

CYYZ

COMM

RCO London rdo 123.275 (FISE)
ATIS 120.825
CLNC DEL 121.3 all dep acft ctc clnc del dur 12-04Z†
APRON ADV North apron 122.275 (122.825)
 South apron 122.075 (122.825)
 A-CDM Coordinator 122.875 (122.825)
 Apron Tow Coordinator 136.525
 FedEx, Infield Concourse, Cargo West 122.275 (North apron),
 Skyservice/Avitat, 3 Bay Hgr Aprons 122.075 (South apron).
GND 119.1 121.65 121.9
TWR Toronto 118.35 118.7 (E) (emerg only 905-676-3588)
ARR 124.475 125.4 132.8 134.175
DEP 127.575 128.8
VFR ADV 119.3 133.4

NAV

VOR/DME YYZ 112.15 Ch 58(Y) N43 39 29 W79 37 53 (561')
 PEARSON YTP 116.55 Ch 112(Y) N43 40 18 W79 39 50 (595')
DME IDP 111.95 Ch 56(Y) N43 39 41 W79 37 12 (552') IDP DME bi-directional
 antenna reliable only within 25° either side of IDP and ICV localizer centerlines.
 IJS 109.1 Ch 28 N43 39 44 W79 37 10 (551')
 INV 109.3 Ch 30 N43 40 33 W79 35 58 (565')
 ITO 110.95 Ch 46(Y) N43 40 13 W79 38 03 (572')
ILS ICV 111.95 (Rwy 06R) RVR
 IDP 111.95 (Rwy 24L) RVR
 IJS 109.1 (Rwy 06L) RVR
 ILP 110.95 (Rwy 15R) RVR
 INV 109.3 (Rwy 24R) RVR
 ITO 110.95 (Rwy 33L) RVR
 ITX 109.7 (Rwy 05) RVR
 ILE 110.3 (Rwy 33R) RVR
 IRW 110.5 (Rwy 15L) RVR
 IYZ 111.5 (Rwy 23) RVR

RESTRICTIONS

OPERATING RESTRICTIONS

The following restrictions are in effect:

1. All acft oprg to/fr the A/D are rqr'd to obtain a slot for all ops.
2. Training flights are not permitted in the Toronto Control Zone from 0000-0700 local time. For other times, prior permission is required from National Traffic Management Unit (FLOW CTL) 800-268-4831 or 905-676-3528.
3. All maintenance runs/runups must be conducted in accordance with GTAA APRON & MAINTENANCE RUN PROCEDURES (avbl from opr-tel 416-776-3056). Upon approval contact Apron Coordinator frequency.
4. Airport Reservation Office (ARO) procedure for all General Aviation and Business Aviation acft oprg IFR & VFR flights. Operators must file a dep and arr reservation through an online coordination system; more info avbl on www.torontopearson.com/aro. Ctc ARO at 416-776-7568 or 1-800-267-7568.
5. Opr may implement a Dep Tfc Management Initiative (D-TMI) due capacity reduction on rwys, deicing facility, or other constraint. Existing slots and reservations may be reallocated to balance hourly demand with capacity. When D-TMI in effect, scheduled operators to verify slot reallocation through Airport Collaborative Decision Making (A-CDM) and General & Business Aviation to verify reservations through their FBO.

NOISE ABATEMENT RESTRICTIONS

Pursuant to CAR 602.105 and CAR 602.106, the following restrictions are in effect:

1. Noise abatement pro apply to all acft, (VFR & IFR) wx permitting 04-12Z±.
2. Arrivals and departures of acft are rstd as per the table below:

Aircraft	Restricted Hours - local time
Noise Certification or Type	Arrivals & Departures
I All non-noise certificated jet aircraft	2000 - 0800
II All ICAO annex 16, vol 1 chapter 2 & equivalent aircraft	0000 - 0700
III All ICAO annex 16, vol 1 chapter 3 & equivalent aircraft (subject to paragraph 4 or 5)	0030 - 0630
IV All other aircraft (subject to paragraph 4 or 5)	0030 - 0630

- a) Non-noise certificated jet powered acft are prohibited from departing on Runways 05, 06L, 06R, 15L, 15R and 33L.
 - b) Between 0000 and 0630 local time, departures are prohibited on Rwys 05, 06L, 06R, 15L and 15R and arrivals are prohibited on Rwys 24R, 24L, 23, 33R, 33L and 15R unless assigned by ATC.
 - c) All acft operating on a scheduled and repetitive basis are rqr'd to obtain an extension or an exemption to opr dur the rstd hrs. Submit req for oprg ext on the day of ops to the GTAA with justification at 416-776-3480 or 1-800-267-SLOT (7568), (fax 416-776-5552). For advance exemption requests or information, make submission in writing to the Manager, Slots & Capacity Allocation, Greater Toronto Airports Authority, Toronto Pearson International Airport, P.O. Box 6031, Toronto AMF, Ontario, L5P 1B2 (fax 416-776-3483).
 - d) All other ops are rqr'd to obtain permission to opr dur the rstd hrs by contacting the GTAA on the day of operation at 416-776-3480 or 1-800-267-SLOT (7568), (fax 416-776-5552).
3. VFR acft 04-12Z±: climb rwy hdg to 3600 ASL. When wx does not permit climbing to 3600 ASL, climb rwy hdg to max alt allowed by rules for VFR flt in controlled airspace.

TORONTO / LESTER B. PEARSON INTL ON (Cont'd)

CYYZ

PRO

Pilots should refer to Canadian Airport Charts (CAC) to obtain details on established hot spots, prior to operating on maneuvering areas. CAC are available for free on the NAV CANADA website.

IFR CLEARANCE ACKNOWLEDGEMENT

Acknowledgment of IFR clncs with Toronto twr clnc del shall include the acft call sign, transponder code & name of SID pro that was assigned in the IFR clnc.

When informed by ATIS or by the arr controller that simultaneous ILS apchs are in progress, pilots shall advise the arr controller immediately of any avionics unsvc or if unable to comply. In VFR wx acft may be vectored to intercept the lczr at a point above the GP.

Clnc to opr within the Toronto class C airspace will only be given to acft equipped with functioning transponder & mode C unless prior approval obtained from ATC 905-676-4509 (IFR acft) or 3589 (VFR acft).

Multilateration: Pilots must keep their transponder on at all times when maneuvering on the aprt, turned on prior to brake release and on arrival, on until final engine shutdown. Pilots that do not have a transponder code issued by ATC must squawk 1000 when taxiing.

CROSSWIND CONDITIONS

Anticipate landing 05/23 & 06L/24R in crosswinds up to 30 kt at 90°.

DURING SNOW CLEARING OPERATIONS

Acft should be prepared to dep from any rwy (incl 06L & 06R).

DE-ICING OPERATIONS

CENTRAL DE-ICING FACILITY (CDF)

OVERVIEW

All de-icing ops are performed with acft engines oprg, unless otherwise advised by Pad Control or ICEMAN.

Pad 5

- Centre lane will accommodate all acft.
- Acft with wingspans less than 36m may use North/South lanes.

Pad 1, 2, 3, 4 & 6

- Centre lanes will accommodate acft with wingspans 64.9m/213ft and smaller.
- Acft with wingspans less than 36m may use North/South lanes.

1. Prior to departing Parking Position, ctc CLNC DEL/APRON/GND (as applicable) and advise, "ACFT DE-ICING REQUIRED".
2. On Twys T,V and E, hold short of ICE# and when directed by Ground Control monitor Pad Control on 131.17. Follow Pad Control taxi instructions to the entrance of the de-icing pad.
3. When directed by Pad Control ctc ICEMAN on the assigned freq (129.62 or 131.37).
4. Follow verbal instructions, guidance displays and lights (as applicable) into staging and/or de-icing bays.
5. Once acft is in final stop position, brakes are set and acft configured for de-icing, ctc ICEMAN and advise, "BRAKES SET, ACFT CONFIGURED, READY TO DE-ICE". At this time, pass along any specific fluid and/or treatment requirements.
6. After de-icing, do not move acft. Ctc Pad Control on 131.17 when instructed by ICEMAN to obtain taxi instruction.
7. Follow Pad Control instruction to designated exit points. When instructed by Pad Control ctc Ground Control on assigned freq.
8. Specific acft operations plan in effect for acft with wingspans 65m/214ft up to 79.9m/262ft. Restrictions in place include:

- For Central De-icing Facility (CDF) operations, no turns from Twy E into any of the de-icing pads are permitted. The only taxi route permitted for de-icing is via twy T into Pad 5.

ONTARIO

AERODROME / FACILITY DIRECTORY


TORONTO / TARTEN ON (Heli)

CPA5

REF	N43 39 14 W79 39 28 Adj W 10°W UTC-5(4) Elev 560' VTA A5000	
OPR	Tarten Equipment Ltd 905-670-1704 Cert PPR	
FLT PLN	Pilots to open/close VFR Flt Pln with London FIC via phone or London rdo 123.275 when practicable.	
FIC	London 866-WXBRIEF (Toll free within Canada) or 866-541-4104 (Toll free within Canada & USA)	
HELI DATA	FATO/TLOF 65' x 65' ASPH Safety Area 85' x 85' Max heli overall length 43.3'	
RCR	Opr	
COMM		
TWR	Toronto 118.35 118.7	
PRO	Arr/dep 329° fr heli, slope 8% (H3), day use only. Ctc Toronto twr for specific instructions prior tkof & ldg. Heli on 208° rad/2.0 DME fr YYZ VOR.	

TORONTO / BILLY BISHOP TORONTO CITY AIRPORT ON

CYTZ

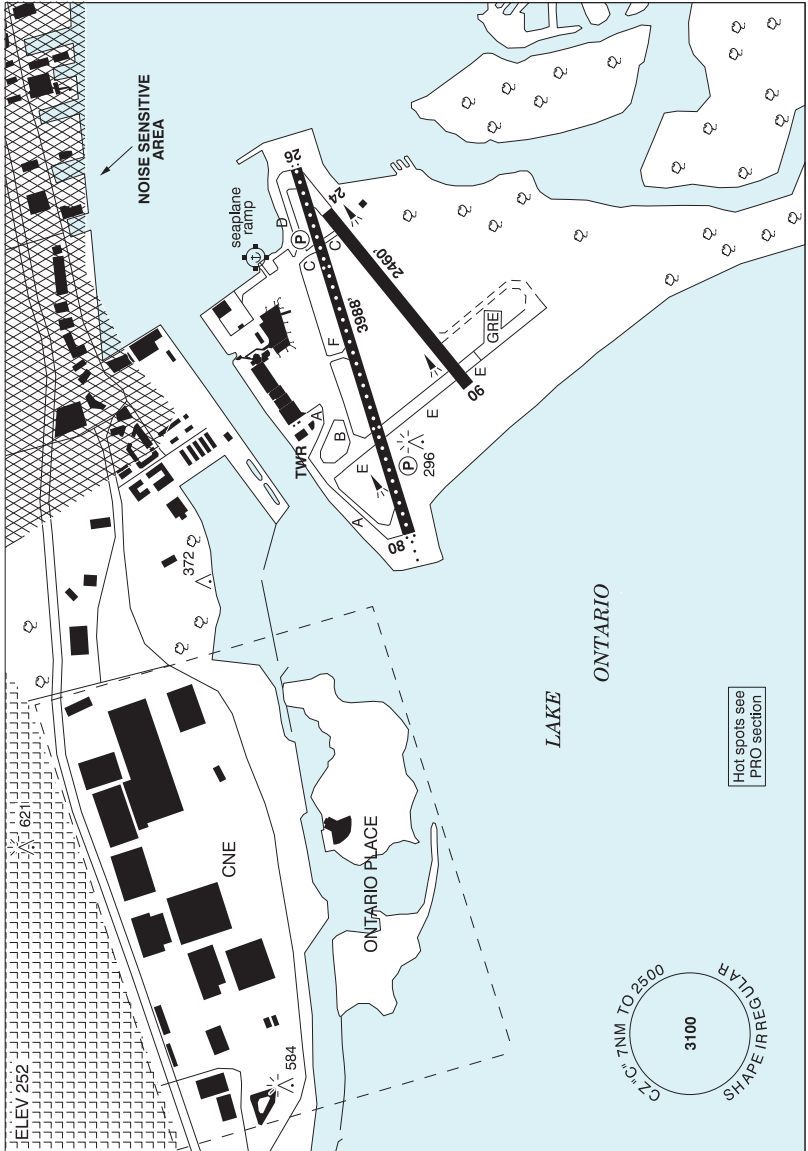

REF	N43 37 39 W79 23 46 Adj S 11°W UTC-5(4) Elev 252' VTA A5000 LO6 T2 CAP RCAP
OPR	Toronto Port Authority 416-203-6942 Cert Ldg fees
PF	A-1,6 B-2,3 C-4,5

ONTARIO

AERODROME / FACILITY DIRECTORY

TORONTO / BILLY BISHOP TORONTO CITY AIRPORT ON (Cont'd)

CYTZ

CUST	AOE/90 888-226-7277 13-05Z†
FLT PLN	Pilots to open/ close VFR flt plan with London rdo 123.15 or by phone.
FIC	London 866-WXBRIEF (Toll free within Canada) or 866-541-4104 (Toll free within Canada & USA)
ACC	Toronto 905-676-4590/4591/4592 or 888-217-1241
WX	METAR AUTO H24 (see COMM). TAF H24, issue times: 02, 08, 14, 20Z. WxCam
DUAT	Porter FBO
SERVICES	1145-0400Z† dly Ferry and pedestrian tunnel ltd hrs - no other access to aprt. 100LL, JA-1 (FSII avbl)
FUEL	All
OIL	1,3
S	DESIGNATED CAT 6 1145-0400Z†, O/T call out chg 2 hr PN
ARFF	Stolport FBO 416-203-1144 130.57 1145-0400Z†
PVT ADV	Porter FBO 416-203-2424 123.35 1145-0400Z†
RWY DATA	Rwy 08(082°)/26(262°) 3988x150 grooved ASPH Rwy 06(061°)/24(241°) 2460x100 ASPH
RWY CERT	Rwy 08 RVR 1200(1/4sm)/Rwy26 RVR 1200(1/4sm) AGN IIIA Rwy 06/24 AGN I
RCR	Opr 1145-0345Z† CRFI/RSC avbl ltd hrs. PCN
LIGHTING	06-(TE ME), 24-(TE ME) 08-AS(TE HI CL) P1 3.9°, 26-AS(TE HI CL) AP 4.25° MEHT 63' See CAUTION PAPI P1 apch Rwy 08 and APAPI apch Rwy 26. Rwys 08 & 26 - three white inset pre-thld centerline lgts. Two pairs of inset white lgts 1099' upwind of each thld mark. Yellow rwy edge lgts for final 1305' Rwy 26 and Rwy 08.
COMM	
ATIS	133.6 1130-0400Z†
GND	121.7 1130-0400Z†
TWR	City 118.2 119.2 (V) 1130-0400Z† (emerg only 416-973-9240)
ATF	ffc 118.2 0400-1130Z† within CZ 7NM SHAPE IRREGULAR 2500 ASL
ARR	Toronto 133.4
DEP	Toronto 133.4
AWOS	133.6 0400-1130Z†
NAV	
DME	TORONTO CITY ITZ 110.15 Ch 38(Y) N43 37 38 W79 23 58 (296') ITZ DME unmonitored when twr clsd. DME not usable within 1.0 DME. ITZ DME bi- directional antenna reliable only within 25° either side of ITZ and ICR localizer centerlines.
ILS	ITZ 110.15 (Rwy 08) Ch 38(Y) RVR. ITZ ILS unmonitored when twr clsd.
LOC	ICR 110.15 (Rwy 26) RVR. ICR LOC unmonitored when twr clsd.
PRO	Pilots should refer to Canadian Airport Charts (CAC) to obtain details on established hot spots, prior to operating on maneuvering areas. CAC are available for free on the NAV CANADA website. VFR Arrivals: Final apch Rwy 24 offset 10° S due bdgs to 625 ASL along lakeshore. Final apch Rwy 24 to be flown over water parallel to lakeshore til intercept of Rwy 24 centreline. Abv 15°C, no acct with more than 100 pax or over 85,000 lbs is auth to perform 180° turns on Rwy 08/26 without perms 416-293-6942 Ext 17

ONTARIO

AERODROME / FACILITY DIRECTORY

TORONTO / BILLY BISHOP TORONTO CITY AIRPORT ON (Cont'd)

CYTZ

PRO (Cont'd)	<p>VFR FLIGHTS All VFR acft should anticipate arr and dep instructions fr ATC.</p>
NOISE ABATEMENT	<p>ARRIVALS - Acft entering CZ from over Lake Ontario to the S ctc Billy Bishop Toronto City TWR 119.2. - Acft entering CZ via designated VFR routes ctc Billy Bishop Toronto City TWR 118.2 when crossing Hwy 401 fr Centerpoint Mall, or at Leslie & 401, Humber Bay, or Bluffers Park VFR checkpoints.</p> <p>DEPARTURES - Acft departing the CZ to the northeast, not above 2000 ASL unless cleared to enter Class C airspace. - Acft departing the CZ at Humber Bay not above 1700 ASL unless cleared to enter Class C airspace. - Acft departing the CZ via Bluffer's Park not above 2500 ASL unless cleared to enter Class C airspace.</p> <p>RESTRICTIONS Pursuant to CAR 602.105, the following restrictions are in effect. 1. No arr/dep btwn 0400-1145Z† dly exc MEDEVAC & emerg. 2. All jet acft (exc MEDEVAC flts) and certain types of propeller acft are proh fr utilizing the aprt. Pilots should check with aprt ops prior to arr. 3. Rgt hand circuits Rwys 06, 08 4. Rotary wing acft are to conform to established circuit pattern, unless auth by ATC. 5. All pilots are rqrd to check with the Aprt Duty Mgr (ADM) prior to conducting any engine maint run-ups. 6. All pilots are encouraged to minimize the use of "reverse thrust" upon ldg, as long as flt safety is not jeopardised in any way.</p> <p>PROCEDURES Pursuant to CAR 602.105, the following procedures are in effect. 1. Pilots are requested to maintain 2000 ASL or above over Metropolitan Toronto Zoo (N43 49 05 W79 11 15). 2. Avoid overflight of noise sensitive areas, see Toronto/Billy Bishop Toronto City Airport VTPC for east VFR routing. 3. All arr/dep acft to avoid flt over CNE/Ontario Place. For details see Toronto/Billy Bishop Toronto City Airport VTPC and Toronto/Billy Bishop Toronto City Airport sketch.</p>
CAUTION	<p>Frequent banner towing activity over CNE in fixed pattern 1500 ASL and below. Vessels up to 116' (362 ASL) in vic of final apch to all rwys. PAPI P1 apch slope Rwy 08 will ensure clearance over tall vessels. DME/glide path antenna 296 ASL (45 AGL) at A/D, see sketch. APAPI Rwy 26 apch slope 4.25°. APAPI apch slope Rwy 26 will ensure clearance over vessels and chimney (N43 38 45 W79 19 59), 952 ASL (700 AGL) 2.6NM fr Thld 26. Secondary ERS subject to availability of ferry ops. Wind turbine aprx 1NM W of aprt at CNE 584 ASL (323 AGL) N43 37 52 W79 25 29. Exty bird activity on A/D. Seapl ramp rstd to acft with max wt of 4000 lbs. Flagpole 372 ASL (121 AGL) located 0.4NM N of Thld Rwy 08.</p>